

55" of spectacular engineering.

The 55" Edge has been designed as a cost effective, more energy efficient, longer lasting alternative to the popular 55" LCD video wall panel.

Specifying and installation have never been easier due to the familiar 55" size and multiple mounting options.

Move away from LCD bezels and embrace a true large format display.



Colours make up reality. Colour enhancing LED technology with superior colour purity and a wide colour gamut produce vibrant and natural colours for eyecatching, try to life imagery.




Fixed resolutions possible

Custom resolutions or 1080p and 4K UHD resolutions available.



1080: 110" / 165" / 220" **4k UHD**: 220" / 274" / 328" / 438"



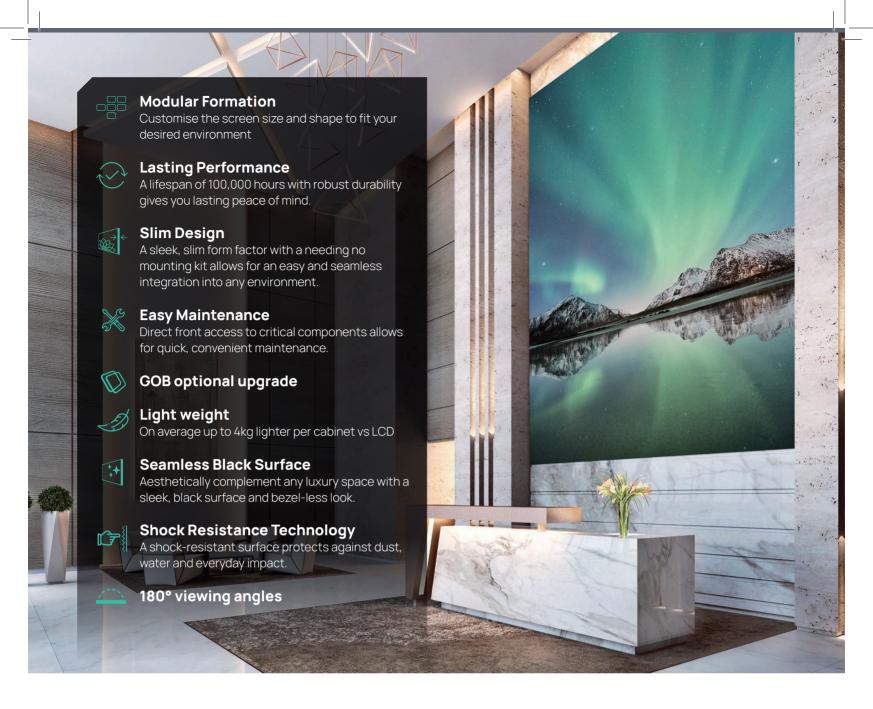


Two mounting methods

Having the freedom to attach a LED display to an existing mounting solution can make a big difference. The industry standard VESA or wall mounting options enables the EDGE platform to be attached in a matter of seconds for quick and easy mounting.



Wall mounts

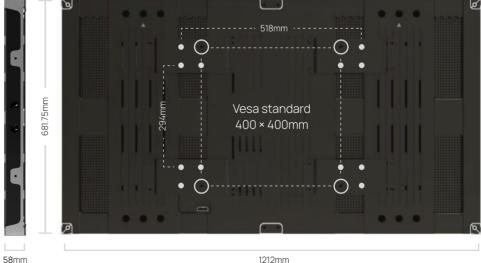

1212mm



SPECIFICATIONS

55" EDGE (SMD*)

* GOB optional

Pixel Pitch (mm)	1.2	1.5	1.8	2.5
Cabinet Dimensions (W × H × D)	1212 × 681.75 × 58mm 47.72 × 26.84 × 2.28in	1212 × 681.75 × 58mm 47.72 × 26.84 × 2.28in	1212 × 681.75 × 58mm 47.72 × 26.84 × 2.28in	1212 × 681.75 × 58mm 47.72 × 26.84 × 2.28ir
Weight (kg / lbs)	15 / 33	15 / 33	15 / 33	15 / 33
OPTICAL PARAMETERS				
Resolution	960 × 540	768 × 432	640 × 360	480 × 270
Aspect Ratio	16:9	16:9	16:9	16:9
Brightness (nits = cd/m²)	≤600	≤600	≤600	≤600
Refresh Rate (Hz)	≤3840	≤3840	≤3840	≤3840
Colour Temperature (K)	2500 ~ 9000	2500 ~ 9000	2500 ~ 9000	2500 ~ 9000
ELECTRICAL PARAMETERS				
Power Consumption Max (W/m²/W/ft²)	≤570 / 52.95	≤510 / 47.38	≤450 / 41.81	≤390 / 36.23
Power Consumption Typical (W/m²/W/ft²)	≤230 / 21.37	≤200 / 18.58	≤180 / 16.72	≤160 / 14.86
Working Voltage	AC: 100 V ~ 240V, 50 ~ 60 Hz	AC: 100 V~240V, 50 ~ 60 Hz	AC: 100 V~240V, 50 ~ 60 Hz	AC: 100 V~240V, 50 ~ 60 Hz
ADDITIONAL FEATURES				
Lifetime (Hours)	100,000	100,000	100,000	100,000
Operating Temp (°C / °F)	-10 ~ +60 / +14 ~ +140	-10 ~ +60 / +14 ~ +140	-10 ~ +60 / +14 ~ +140	-10 ~ +60 / +14 ~ +14
Storage Temp (°C / °F)	-25 ~ +60 / -13 ~ +140	-25 ~ +60 / -13 ~ +140	-25 ~ +60 / -13 ~ +140	-25 ~ +60 / -13 ~ +14
Humidity Range (%)	10 ~ 90	10 ~ 90	10 ~ 90	10 ~ 90





Please contact us if you have any questions, we're always happy to help

www.vodvisual.com

China Head Office

5D-701 Software Industry Base, Haitian 2nd Road, Nanshan District, Shenzhen, Guangdong cn@vodvisual.com Tel:+86 755 2267 7271 **UK Office**

Unit 3 Clearwater Business Park Frankland Road Swindon, SN5 8YZ United Kingdom

Tel: +44 (0) 20 3852 9500

UK Showroom

The Pavilion Merchant Square London, W21JZ United Kingdom

Tel: +44 (0) 20 3832 9500

USA Office22 Boston Wharf Road,

7th Floor, Boston, MA 02210 United States

Tel: +1 (833) 533-7836

USA Showroom

123 Heiman Street, Suite 200, San Antonio, Texas 78205 United States

Tel: +1 (833) 533-7836

