


V-POSTER



VOD

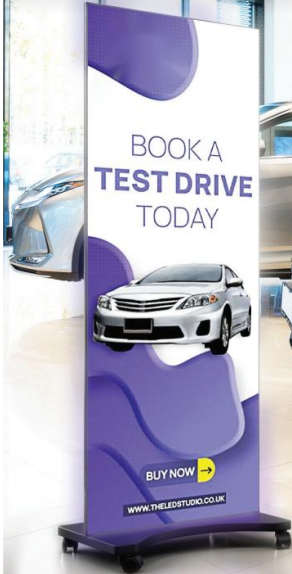

MOBILE. VERSATILE. STYLISH



ENERGY
EFFICIENT



LIGHT
WEIGHT



DURABLE



SCALABLE



PIXEL PITCH
P1.25, P1.56,
P1.8 & P2.5

VCD

MAXIMIZE ROI WITH MOBILE TECHNOLOGY

Don't tie down your investment with fixed location assets. The V-Poster is the perfect digital signage solution for ever changing spaces with sustainability in mind.



THREE MOUNTING METHODS

Mobile
Wall
Hanging



INTEGRATED SPEAKERS

Integrated speakers make the V-Poster perfect for wayfinding or information points at museums, showrooms or points of sale.



CLOUD & APP MANAGEMENT

Cloud based applications for content management and scheduling.



PLUG & PLAY

Pre-built and configured right out of the box.


VCD

GET CREATIVE

SCALE YOUR DISPLAYS
USING THE V-POSTERS
CASCADE MODE



BEZEL FREE

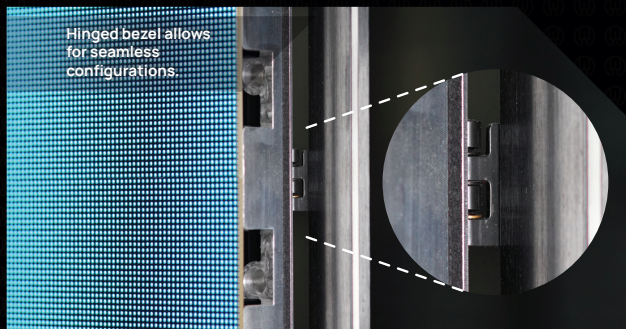

*V-Posters must have the same pixel pitch in order to utilise cascade mode.



EDGE-TO-EDGE

THREE

MOUNTING METHODS



MOBILE



WALL



HANGING

MULTIDEVICE COMPATIBLE



HDMI



RJ45



USB



WIFI



AUDIO



LIGHT &
TEMPERATURE
SENSOR

VCD

BUILT TO LAST



GOB This innovative technology seals the LED's with transparent epoxy glue. This protects the LED from any harmful accidents by making it anti-collision, waterproof, anti-UV and dust proof. The lifespan of the LED is also extended due to improved heat dissipation.

A MUST IN HEAVY FOOTFALL AREAS!

USER INTERACTION: TOUCH COMPATIBLE

With an infrared frame, the V-Poster is touch capable with up to 16 touch points.

*Touch function is an additional option




VCD

A close-up photograph of a person's hand pulling a silver, ergonomic handle attached to a screen module. The handle is being pulled towards the left, away from the screen. The screen itself is displaying a vibrant, colorful image of a mountain range under a blue sky. The background is dark, and the overall composition is clean and professional.

FAST & EASY SERVICING


The V-Poster can be easily maintained and managed from the front for quick and easy servicing. Module swaps take merely seconds.

LIGHT & COMPACT

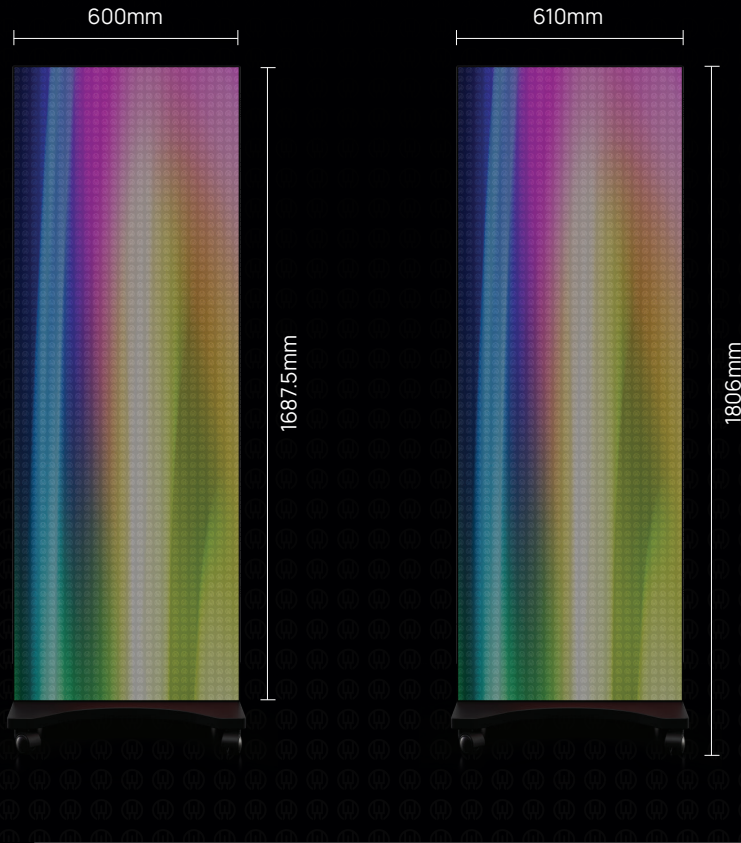

Weighing in at only 35kg the V-Poster couldn't be easier to handle or relocate.

*Note: Weight with mobile base = 42kg.

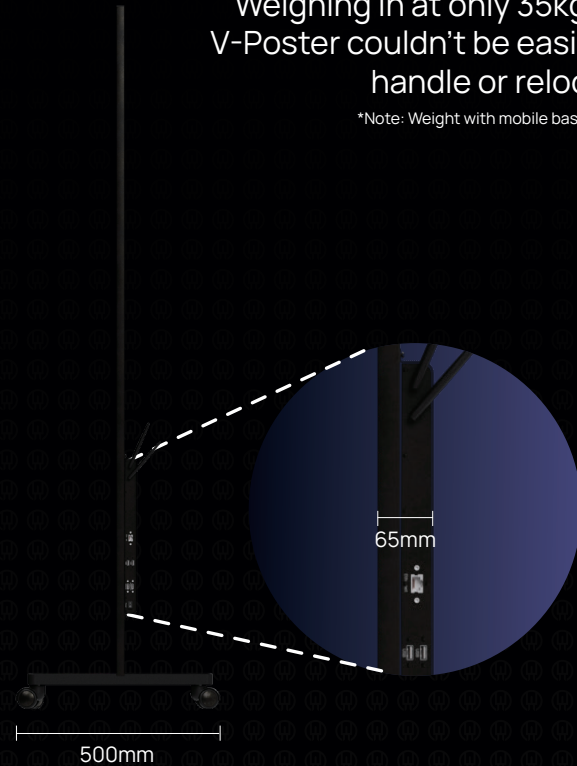

VCD



Specifications	P-1.25	P-1.56	P-1.8	P-2.5
Pixel Pitch (mm)	1.25	1.56	1.8	2.5
Resolution	480x1350	384x1080	320x900	240x675
External Dimension (W+D+H) <small>*with attachable base</small>	610x500x1806mm 23.62x90.68x71.1in			
Screen Dimension (W+H)	600x1687.5mm 23.62x66.43in			
Weight (kg / lbs)	35 / 77 (Without Base)			
Brightness	50–800cd/m2 Adjustable			
Color Temperature	2500k–10000k Adjustable			
Viewing Angle (H/V)	140°			
Refresh Rate	≤3840HZ			
Processing	≤16bit			
Voltage (V)	AC90–264VAC, 47–63 HZ			
Power Consumption (Max.)	300–450W			
Power Consumption (Avg.)	150–225W			
Maintenance Mode	Front maintenance			
Operation / Storage temperature (°C / °F)	-20 - +50 / -4 - +122			
Relative Humidity	10%-90%			
Communication Mode	WIFI, 4G, LAN			
Display Mode	Synchronous / Asynchronous			

*All data contained is subject to change.

Contact us: +86 755 2267 7271
www.vodvisual.com

VCD

VOD

Please contact us if you have any questions,
we're always happy to help

www.vodvisual.com

China Head Office

5D-701 Software
Industry Base, Haitian
2nd Road, Nanshan
District, Shenzhen,
Guangdong
cn@vodvisual.com
Tel: +86 755 2267 7271

UK Office

Unit 3 Clearwater Busines
sPark Frankland Road
Swindon, SN5 8YZ
United Kingdom
Tel: +44 (0) 20 3852 9500

UK Showroom

The Pavilion
Merchant Square
London, W2 1JZ
United Kingdom
Tel: +44 (0) 20 3832 950

USA Office

22 Boston Wharf
Road, 7th Floor,
Boston, MA 02210
United States
Tel: +1 (833) 533-7836

USA Showroom

123 Heiman Street,
Suite 200, San
Antonio, Texas
78205
United States
Tel: +1 (833) 533-7836